




3RS Series Shock Rack Transport



3RS-7U24-25B

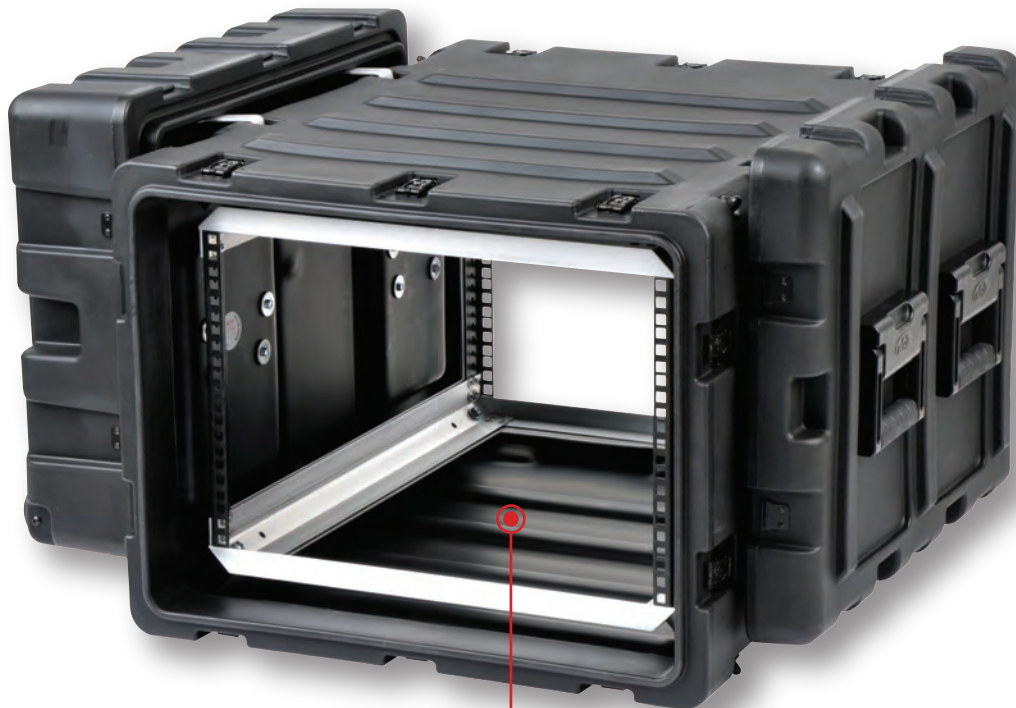

3RS-5U30-25B

MIL-STD

- Meets or Exceeds MIL-STD 810G
- Standard payload range 40 to 150 lbs.
- Optional extended payload range 160 to 300 lbs.
- Standard 19" Rack width per ANSI/EIA-310-C
- Standard Rack depth 24" and 30" rail to rail
- Square hole rack rails to accommodate either #10-32 US standard, or 6mm international standard cage nuts
- 2" front lid, and 5" rear lid with edge casters standard, other options available
- SKB's Rugged roto-molded shell ensures industry leading strength and impact resistance
- Molded in stacking ribs and lugs are designed to stack with competitive manufacturers cases
- Black powder coated stainless steel hardware (standard) which is recessed for protection
- 8 comfort grip spring loaded lift handles
- Automatic pressure relief valve (*standard*)
- Lid hangars (*standard*)
- Case coupling straps (*standard*)
- Reduced Footprint
- Low Profile
- Light Weight

Case Specifications

All Standard depths - front to rear rail: 24"

PART#	LID DEPTH		RACK UNITS	RACK HEIGHT
	FRONT	REAR		
3RS-3U24-25B	2" / 5.1 cm	5" / 12.7 cm	3 space	5.5" / 14 cm
3RS-4U24-25B	2" / 5.1 cm	5" / 12.7 cm	4 space	7" / 17.8 cm
3RS-5U24-25B	2" / 5.1 cm	5" / 12.7 cm	5 space	8.75" / 22.2 cm
3RS-7U24-25B	2" / 5.1 cm	5" / 12.7 cm	7 space	12.25" / 31.1 cm
3RS-9U24-25B	2" / 5.1 cm	5" / 12.7 cm	9 space	15.75" / 40 cm
3RS-11U24-25B	2" / 5.1 cm	5" / 12.7 cm	11 space	19.25" / 48.9 cm
3RS-14U24-25B	2" / 5.1 cm	5" / 12.7 cm	14 space	24.5" / 62.2 cm

All Standard depths - front to rear rail: 30"

PART#	LID DEPTH		RACK UNITS	RACK HEIGHT
	FRONT	REAR		
3RS-3U30-25B	2" / 5.1 cm	5" / 12.7 cm	3 space	5.5" / 14 cm
3RS-4U30-25B	2" / 5.1 cm	5" / 12.7 cm	4 space	7" / 17.8 cm
3RS-5U30-25B	2" / 5.1 cm	5" / 12.7 cm	5 space	8.75" / 22.2 cm

*Stock color Black. Also available in Desert Tan and OD Green. Custom colors require minimum quantities.