


## Cushioning Performance Curve

for 1.0 pcf (16 g/l) ARPRO® Expanded Polypropylene (EPP) Foam

24 inch Drop, 1<sup>st</sup> Impact/Drop - 1", 2" & 3" Thickness

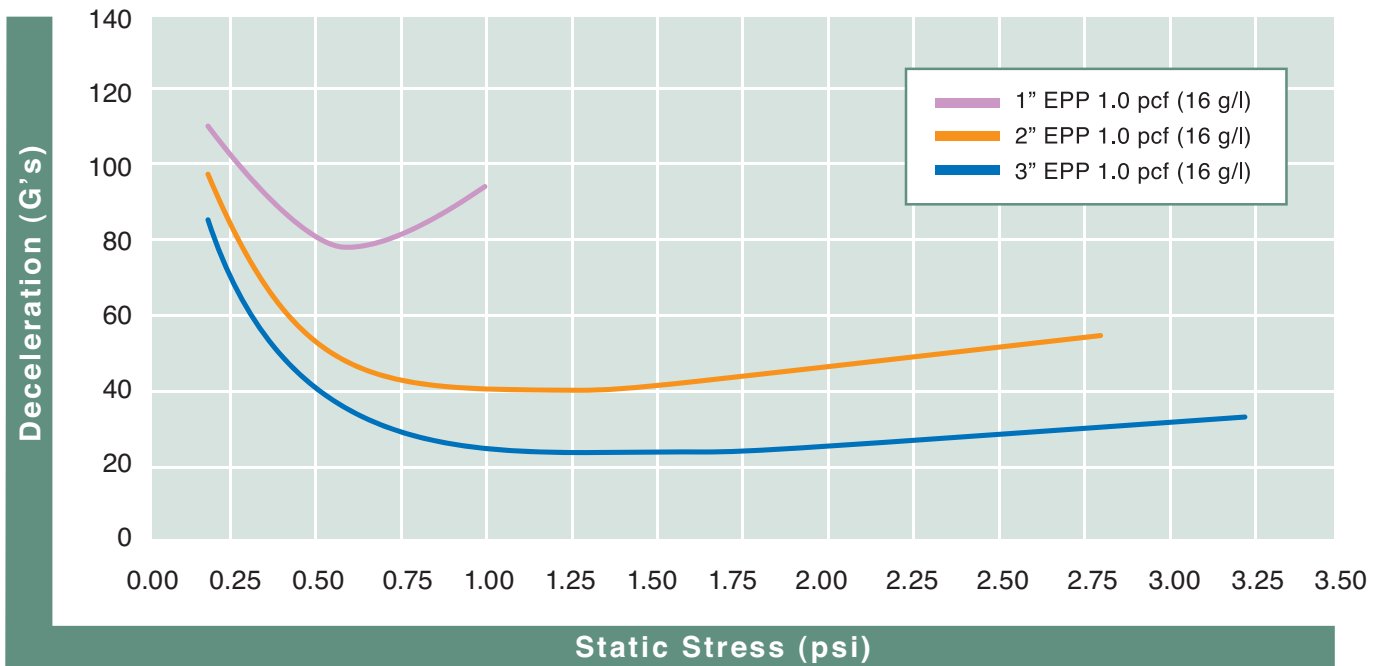

Note: 16 g/l = 1.0 pcf = 56X (g/l = grams per liter; pcf = pounds per cubic foot; X = foam expansion ratio)  
 Sample size = 8" x 8"

ARPRO® is a registered trademark of JSP Licenses LLC.  
 PUBLICATION JSP-16g/l (1.0pcf)-ARPRO-EPP-cushioncurve-1,2,& 3inch-24" drop-1st drop-2006/06

The above data reflects the performance of ARPLANK® panels under controlled test conditions using limited product samples. There can be no assurance that similar results will be achieved in simulated tests or actual commercial use of ARPLANK® panels. JSP makes no representation or warranty, and does not assume any liability, with respect to the accuracy or completeness of such information or the product performance in any particular instance. JSP makes no representation or warranty with respect to ARPLANK® panels, express or implied, including, without limitation, any warranty of merchantability, fitness for a particular purpose, quality or conformity with any description or sample.

MADE WITH  
**ARPRO®**  
 Expanded Polypropylene (EPP)

A PRODUCT OF  
**JSP**  
 INNOVATION®  
 SIMPLIFIED  
 WWW.JSP.COM